

FRAME ORDER SYSTEM

● TANGE SEAMLESS Cr-Mo

TANGE Seamless Cr-Mo Tube

Product	Description	Part No.	Outside Diameter D	Thickness T ₁ ~T ₂ ~T' ₁	Butted Part		Tapered Part		Length of Thinned Part C	Length L	Weight (g)
					ℓ ₁	ℓ' ₁	ℓ ₂	ℓ' ₂			
Top Tube	D.B.T.	1411	25.4	0.8~0.5~0.8							240
		1412		0.9~0.6~0.9	80	130	50	50	290	600	274
		1413		1.0~0.7~1.0							309
	S.B.T.	1414		0.9~0.7	100	—	50	—	450	600	270
	P.G.	1415		0.9	—	—	—	—	—	600	327
Down Tube	D.B.T.	1431	28.6	0.8~0.5~0.8							295
		1432		0.9~0.6~0.9	80	180	50	50	290	650	338
		1433		1.0~0.7~1.0							382
	S.B.T.	1434		0.9~0.7	100	—	50	—	500	650	319
	P.G.	1435		0.9	—	—	—	—	—	650	397
Seat Tube	S.B.T.	1451	28.6	0.8~0.5~0.8	80	180	50	50	250	610	278
		1452		0.9~0.6~0.9	80	180	50	50	250	610	322
	S.B.T.	1453		0.9~0.7	100	—	50	—	460	610	312
		1455		1.0~0.7	100	—	50	—	460	610	324
P.G.	1454	0.9	—	—	—	—	—	610	373		
Head Tube	P.G.	1401	31.8	1.0	—	—	—	—	200	152	

Product	Description	Part No.	Outside Diameter		Thickness T	Straight Part ℓ ₁	Tapered Part ℓ ₂	Total Length L	Weight (g)
			D ₁	D ₂					
Seat Stay	S.T.P.	1501	14.0	11.0	0.8	240	360	600	300
		1503	15.9	11.0	0.8	280	320		340
Chain Stay	S.T.P. (Even-Thick)	1552	22.2 (CW-3)	12.5	0.8	120	300	420	280
		1554	22.2 (CW-2)		0.8				280
Fork Blade	S.T.P. (Even-Thick)	1601	23.0 Oval (29.0 × 17.0)		1.0	120	300	420	390
		1605	24.0 Oval (28.0 × 20.0)		1.0	140	280		410
		1602	23.0	13.0	1.0	120	300		390
		1607	24.0	1.0	140	280	410		

"Cr-Mo" Fork Stem


Part No.	D ₁	D ₂	T ₁	T ₂	ℓ ₁	L	Weight (g)	
								Fork Stem
	1703 (S.B.T.)	25.4	22.2	2.7	1.6	50	254	272

TANGE Cr-Mo Tube

Product	Description	Part No.	Outside Diameter D	Thickness T ₁ ~T ₂ ~T' ₁	Butted Part		Tapered Part		Thinned Part C	Total Length L	Weight (g)
					ℓ ₁	ℓ' ₁	ℓ ₂	ℓ' ₂			
Top Tube	D.B.T.	9412	25.4	0.9~0.6~0.9							274
		9413		1.0~0.7~1.0	80	130	50	50	290	600	309
		T.B.T.		9414	0.9~0.6~0.8						
Down Tube	D.B.T.	9432	28.6	0.9~0.6~0.9							338
		9433		1.0~0.7~1.0	80	180	50	50	290	650	382
		T.B.T.		9434	0.9~0.6~0.8						
Seat Tube	S.B.T.	9454	28.6	0.9~0.6							290
		9452		0.9~0.6~0.9	80	180	50	50	250	610	322
	S.B.T.	9455		1.0~0.7							324
	D.B.T.	9453		1.0~0.7~1.0							302
Head Tube	P.G.	9400	31.8	1.0	—	—	—	—	200	152	

See page 28 about Seat Stay, Chain Stay, Fork Blade and Fork Stem.

● INFINITY MTB ● INFINITY

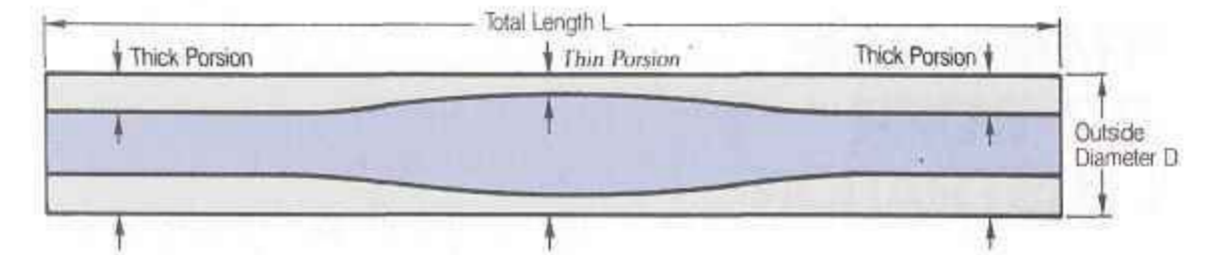

Infinity MTB Tube

Product	Description	Part No.	Outside Diameter D	Thick Portion	Thin Portion	Length L	Weight (g)
Top Tube	D.B.T.	8433	28.6	0.9	0.6~0.9	600	348
Top & Down	T.B.T.	8442	31.8	0.9	0.6~0.8	650	364
Down Tube	T.B.T.	8494	34.9	0.9	0.6~0.8	650	383
Seat Tube	S.B.T.	8455	28.6	1.0	0.7	610	295
Head Tube	P.G.	8401	31.8	1.0		190	145

Product	Description	Part No.	Outside Diameter			Thickness T	Straight Part ℓ ₁	Tapered Part ℓ ₂	Total Length L	Weight (g)
			D ₁	D ₂	D ₁ × D' ₁					
Seat Stay	S.T.P.	9505	15.9	11.0	—	1.0	280	320	600	425
Chain Stay	S.T.P.	9555	22.2	13.0	—	1.0	140	300	440	440
Fork Blade	S.T.P.	9610	25.4	14.5	29.8 × 19.8	1.2*	120	300	420	460
		9612	25.4	14.5	—	1.4~1.1	120	300	420	440

*Even-thick Oval Tube for Crown Type.

Infinity "Cr-Mo" Tapered Butted Tube

Product	Description	Part No.	Outside Diameter D	Thick Portion	Thin Portion	Length L	Weight (g)
Top Tube	D.B.T.	8412	25.4	0.9	0.6	600	270
Down Tube	D.B.T.	8432	28.6	0.9	0.6	650	332
Seat Tube	D.B.T.	8452	28.6	0.9	0.6	610	318
		S.B.T.	8453	28.6	0.9	0.6	610
Head Tube (P.G.)		8400	31.8		1.0	200	152

Product	Description	Part No.	Outside Diameter		Thickness T	Straight Part ℓ ₁	Tapered Part ℓ ₂	Total Length L	Weight (g)
			D ₁	D ₂					
Seat Stay	S.T.P.	9501	14.0	11.0	0.8	240	360	600	300
		9503	15.9	11.0	0.8	280	320		340
Chain Stay	S.T.P.	9551	22.2 (CW-3)	12.5	0.8	120	300	420	338
		9554	22.2 (CW-2)		0.8				338
Fork Blade	S.T.P.	9601	23.0 Oval (29.0 × 17.0)		1.0	120	300	400	413
		9605	24.0 Oval (28.0 × 20.0)		1.0	140	280		432
		9602	23.0	13.0	1.0	120	300		413
		9607	24.0	1.0	140	280	432		

Infinity "Cr-Mo" Fork Stem

Part No.	D ₁	D ₂	T ₁	T ₂	ℓ ₁	ℓ ₂	L	Weight (g)
Fork Stem	9700	25.4	22.2	2.7	1.6	50	254	260