


## ISHIWATA FULL SET OF CrMo BUTTED TUBES



### 017 RECORD BREAKER

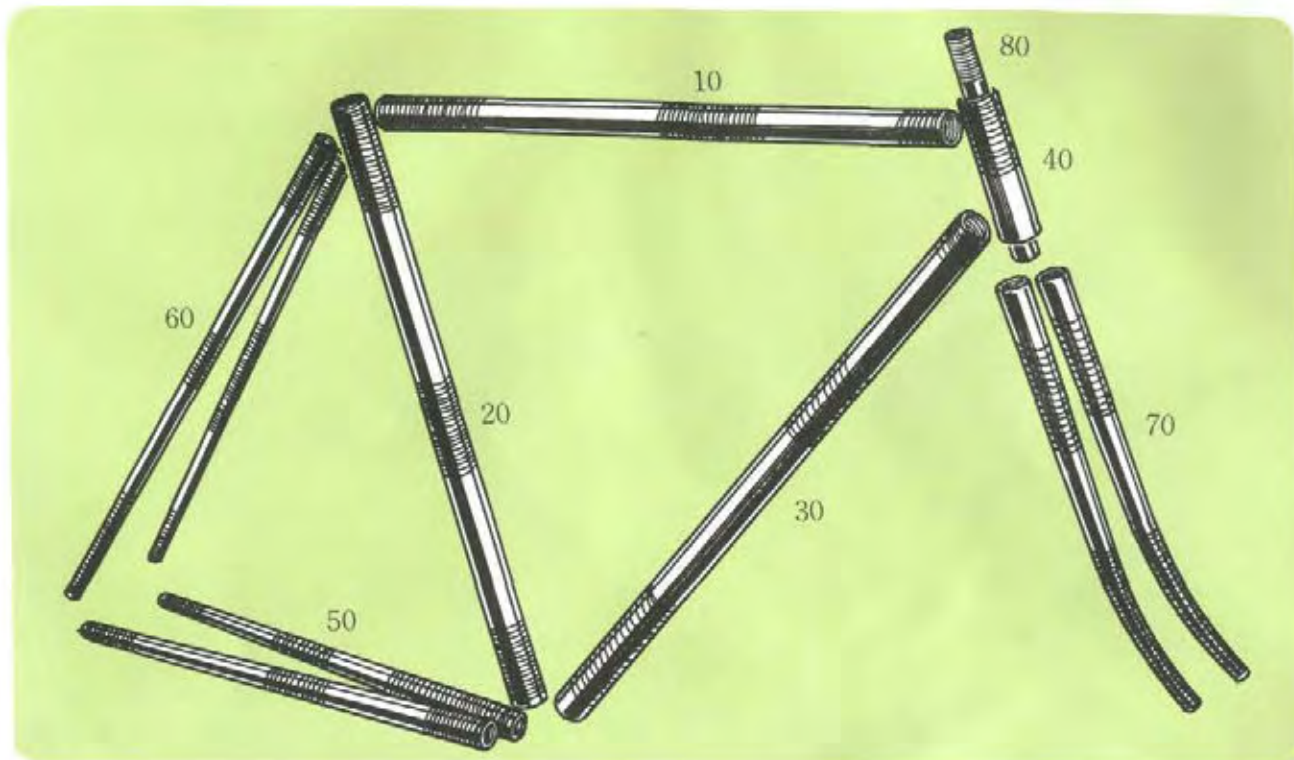


Mark	Description	Out Side Diameter	Thickness T/T'	Length
17C	Top Tube	25.4	0.7/0.4 DB	580
20C	Seat Tube	28.6	0.7/0.4 DB	610
20C	Down Tube	28.6	0.7/0.4 DB	610
40C	Head Tube	31.8	1.0 PG	180
50C	Chain Stays	22.2/12.0	0.8 PG	410
60C	Seat Stays	14.5/10.0	0.6 PG	610
70C	Fork Blades	29x16/12.0	1.0/0.8 TC	400
80C	Column	25.4 (Spline)	2.2/1.6 SB	200

Set of 11pcs  
gr. 1,855

BLADES MARK



## ISHIWATA FULL SET OF CrMo BUTTED TUBES

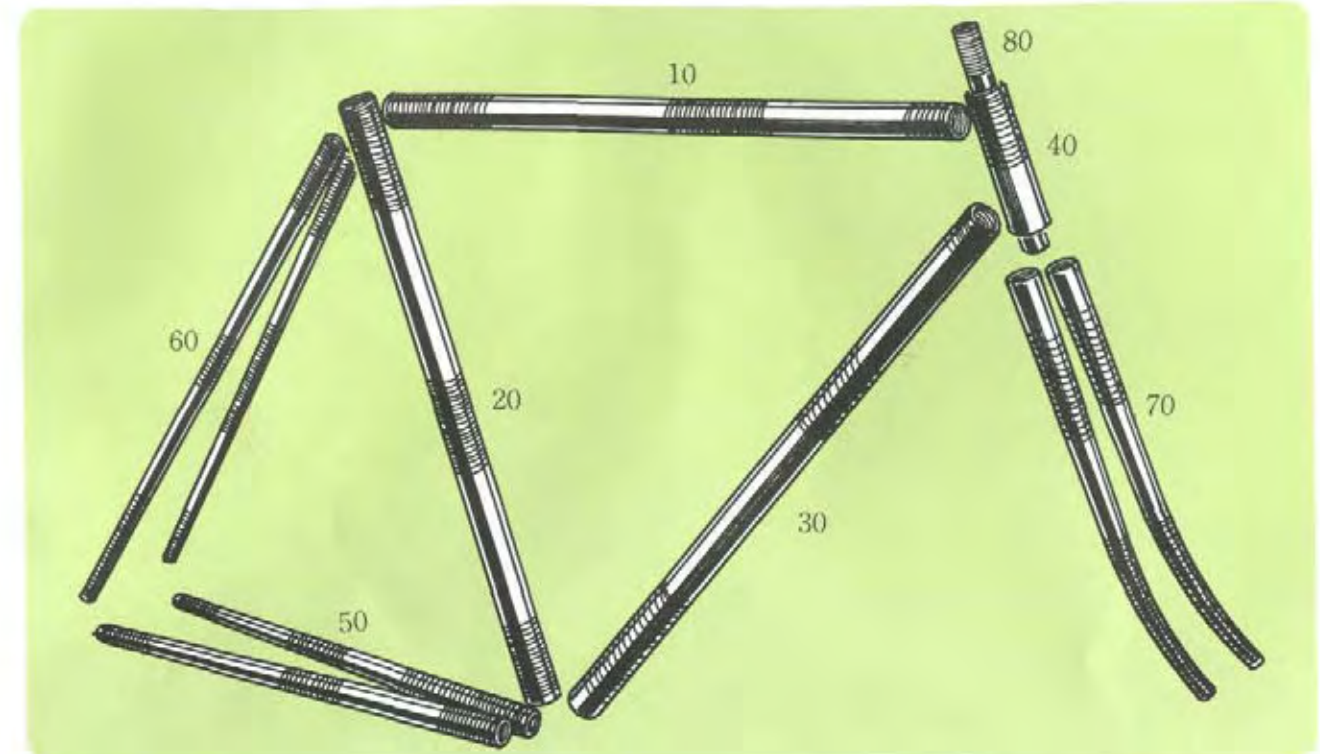

### 015 (α) ALPHA



Mark	Description	Out Side Diameter	Thickness T/T'	Length
15C	Top Tube	25.4	0.6/0.4 DB	580
25C	Seat Tube	28.6	0.7/0.4 SB	610
35C	Down Tube	28.6	0.6/0.35 DB	610
41C	Head Tube	31.8	0.7 PG	180
51C	Chain Stays	22.2/12.0	0.55PG	410
60C	Seat Stays	14.5/10.0	0.6 PG	610
70C	Fork Blades	29x16/12.0	1.0/0.8 TC	400
80C	Column	25.4 (Spline)	2.2/1.6 SB	200

Set of 11pcs  
gr. 1,595

BLADES MARK



### 019 GLORIES VICTORY



Mark	Description	Out Side Diameter	Thickness T/T'	Length
10C	Top Tube	25.4	0.8/0.5 DB	580
21C	Seat Tube	28.6	0.8/0.5 SB	610
30C	Down Tube	28.6	0.8/0.5 DB	610
40C	Head Tube	31.8	1.0 PG	180
50C	Chain Stays	22.2/12.0	0.8 PG	410
60C	Seat Stays	14.5/10.0	0.6 PG	610
71C	Fork Blades	29x16/12.0	1.0 PG	400
80C	Column	25.4	2.2/1.6 SB	200

Set of 11pcs  
gr. 1,990

BLADES MARK



### 022 SPEED GALLANT



Mark	Description	Out Side Diameter	Thickness T/T'	Length
11C	Top Tube	25.4	0.9/0.6 DB	580
22C	Seat Tube	28.6	0.9/0.6 SB	610
31C	Down Tube	28.6	0.9/0.6 DB	610
40C	Head Tube	31.8	1.0 PC	180
50C	Chain Stays	22.2/12.0	0.8 PG	410
61C	Seat Stays	14.5/10.0	0.8 PG	610
71C	Fork Blades	29x16/12.0	1.0 PG	400
80C	Column	25.4	2.2/1.6 SB	200

Set of 11pcs  
gr. 2,185

BLADES MARK

