


SUNTOUR XC PRO MD & SUNTOUR XC PRO

The state of the art from SUNTOUR

XC-Pro incorporates the highest-quality materials and manufacturing processes with state-of-the-art drivetrain and component technology. Engineered for strength and durability, XC-Pro components are the lightest weight in their class.

MD
POWERFLO
WISHBONE SHIFTER
SE
CARTRIDGE BEARING
GREASE GUARD
X-PRESS
POWERING

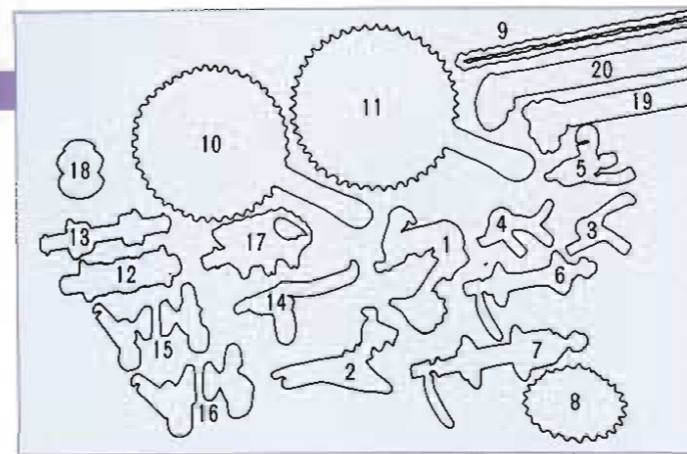

1 REAR DERAILLEUR
Model: RD-XP00-GXB
(Code No. 24039921) (GX Type)
Model: RD-XP00-GTB
(Code No. 24029921) (GT Type)
Model: RD-XP00-SSB
(Code No. 24019921) (SS Type)
Specifications
● ACCUSHIFT PLUS Compatible
● Largest rear cog:
30T (28mm dropout) (GX & GT)
28T (28mm dropout) (SS)
● Total gear capacity:
GX: :39T (Maximum chainring differential: 22T)
GT: 34T (Maximum chainring differential: 20T)
SS: 28T (Maximum chainring differential: 13T)
● Weight: 275g (GX type)
265g (GT type)
235g (SS type)

2 FRONT DERAILLEUR
Model: FD-XP01-GXH
(Code No. 29149911)
Clamp-on/28.6mm
(Code No. 29149913)
Clamp-on/31.8mm
(Code No. 29149915)
Clamp-on/34.9mm
Specifications
● Gear capacity: 24T
● Chainring differential: 7~11T (Outer-center)
1-1/8" (28.6mm)
1-1/4" (31.8mm)
1-3/8" (34.9mm)
● Weight: 116g/1-1/8" (28.6mm)

3 SHIFT LEVER (7-SPEED)
Model: SL-XP00-R7
(Code No. 33129571)
Right/Index
Model: SL-XP00-L
(Code No. 33129701)
Left/Power
Specifications
● ACCUSHIFT PLUS Compatible
● Clamp diameter: 7/8" (22.2mm)
● Weight: 149g/pr.

Standard	Inner Cable		Outer Casing	
	Type	Length	Type	Length
Right (Rear)	029	2,000mm	751	600x280mm
Left (Front)	029	1,500mm	751	600mm

4 WISHBONE SHIFTER (7-SPEED)
Model: SL-XP20-R7
(Code No. 33829571)
Right/Index
Model: SL-XP20-L
(Code No. 33829701)
Left/Power
Specifications
● ACCUSHIFT PLUS Compatible
● Clamp diameter: 7/8" (22.2mm)
● Weight: 225g/pr.

Standard	Inner Cable		Outer Casing	
	Type	Length	Type	Length
Right (Rear)	029	2,000mm	751	520x280mm
Left (Front)	029	1,500mm	751	520mm

5 X-PRESS CONTROL LEVER (7-SPEED)
Model: SL-XP10-R7
(Code No. 33159571)
Right/Index
Model: SL-XP10-L
(Code No. 33159701)
Left/Power
Specifications
● ACCUSHIFT PLUS Compatible
● Clamp diameter: 7/8" (22.2mm)
● Weight: 331g/pr.

Standard	Inner Cable		Outer Casing	
	Type	Length	Type	Length
Right (Rear)	036	2,000mm	751	520x280mm
Left (Front)	036	1,500mm	751	520mm

6 FRONT HUB
Model: HB-XP01-F
(Code No. 52899111) 32H/100mm
(Code No. 52899121) 36H/100mm
Quick release skewer
(Code No. 50249202)
Specifications
● WTB/SUNTOUR Grease Guard System
● Weight: 245g (36H/100mm)

7 FREEHUB (7-SPEED)
Model: FH-XP20-7
(Code No. 47739963) 32H/130mm
(Code No. 47739973) 36H/130mm
(Code No. 47739983) 32H/135mm
(Code No. 47739993) 36H/135mm
Quick release skewer
(Code No. 50249207) For 130mm
(Code No. 50249208) For 135mm
Specifications
● WTB/SUNTOUR Grease Guard System
● Weight: 375g (36H/135mm)

7 FREEHUB (7-SPEED)
Model: FH-XP02-7
(Code No. 47739913) 32H/130mm
(Code No. 47739923) 36H/130mm
(Code No. 47739915) 32H/135mm
(Code No. 47739925) 36H/135mm
Quick release skewer
(Code No. 50249207) For 130mm
(Code No. 50249208) For 135mm
Specifications
● WTB/SUNTOUR Grease Guard System
● Weight: 386g (36H/135mm)

8 CASSETTE COGS (MD) (7-SPEED)
Model: CS-AP20-S7
(Code No. 47199801) 11~24T
Silver
Specifications
● PowerFlo design compatible
● ACCUSHIFT PLUS Compatible
● Standard gear ratio (Weight):
11x12x14x16x18x21x24x28T (231g)

8 CASSETTE COGS (7-SPEED)
Model: CS-AP10-S7
(Code No. 47199802) 12~28T
(Code No. 47199803) 12~30T
Silver
Specifications
● PowerFlo design compatible
● ACCUSHIFT PLUS Compatible
● Standard gear ratio (Weight):
12x14x16x18x21x24x28T (296g)
12x14x16x18x21x24x30T (306g)

9 CHAIN
Model: CH-AP01
(Code No. 50540116)
Silver & Silver
Specifications
● Features: Hardening Treatment Pin
● ACCUSHIFT PLUS Compatible
● Size: 1/2"x3/32"
● Pin width: 7.3mm
● Weight: 325g (116 Links)

10 CRANKSET (MD)
Model: CW-XP10
(Code No. 48119152)
42Tx32Tx20T/L=170.0mm
(Code No. 48119172)
42Tx32Tx20T/L=175.0mm
(Code No. 48119182)
42Tx32Tx20T/L=177.5mm
Specifications
● Features: PowerRing (42Tx32Tx20T only)
● Taper size: VX
● Bolt circle diameter: 94mm (Outer & Middle)
56mm (Inner)
● Available chainrings: 42Tx32Tx20T
● Thread: BC 9/16"x20T (English)
● Weight: 649g (42Tx32Tx20T/L=170.0mm)

11 CRANKSET
Model: CW-XP01
(Code No. 51739747)
46Tx36Tx24T/L=170.0mm
(Code No. 51739751)
46Tx36Tx24T/L=175.0mm
(Code No. 51739755)
46Tx36Tx24T/L=180.0mm
Specifications
● Features: PowerRing (46Tx36Tx24T)
● Taper size: VX
● Bolt circle diameter: 110mm (Outer & Middle)
74mm (Inner)
● Available chainrings: 46Tx36Tx24T
● Thread: BC 9/16"x20T (English)
● Weight: 685g (46Tx36Tx24T/L=170.0mm)

12 BOTTOM BRACKET (MD)
Model: BB-SL10-E
(Code No. 51109901) English
Model: BB-SL10-72
(Code No. 51109902) Oversize
Model: BB-SL10-I
(Code No. 51109904) Italian
Specifications
● Features: MicroLite
WTB/SUNTOUR Grease Guard System
● Taper size: VX
● Thread: BC 1.37"x24T (English Oversize)
36x24T (Italian)
● B.B. Width: 68, 70, 73mm
● Weight: 275g (Model BB-SL10-E)

13 BOTTOM BRACKET
Model: BB-XP00-E
(Code No. 51949901) English
Model: BB-XP00-73
(Code No. 51949902) Oversize
Model: BB-XP00-I
(Code No. 51969923) Italian
Specifications
● Features: WTB/SUNTOUR Grease Guard System
(English, Oversize)
● Ball size: 1/4"x11pcs (w/bearing retainer)
English size
Oversize (73mm)
1/4"x9pcs (w/bearing retainer)
Italian size
● Taper size: VX
● Thread: BC 1.37"x24T (English, Oversize)
36x24T (Italian)
● B.B. Width: 68, 70, 73mm
● Weight: 347g (Model BB-XP00-E)

14 BRAKE LEVER
Model: BL-XP00-S
(Code No. 60209901)
2-Finger type
Specifications
● Reach adjustment range:
23mm
● Clamp diameter: 22.2mm
● Weight: 220g/pr.



14 BRAKE INNER OUTER SET
(Code No. 60999901)

15 CANTILEVER BRAKE
Model: CT-XP20
(Code No. 62689942)
Specifications
● Shoe adjustment range: 22.5~27.5mm
● Weight: 170g

16 CANTILEVER BRAKE (SE)
Model: CT-XP11
(Code No. 62689932)
Specifications
● Features: Self Energizing System
● Shoe adjustment range: 22.5~27.5mm
● Weight: 231g

17 PEDAL
Model: PL-XP02
(Code No. 53219931)
Specifications
● Features: WTB/SUNTOUR Grease Guard System
● Thread: BC9/16"x20T (English)
● Weight: 305g/pr.

18 HEAD SET
Model: HS-XP02-J
(Code No. 50019901) JIS
Model: HS-XP02-I
(Code No. 50019911) English, Italian
Model: HS-XP02-OS
(Code No. 50019915) Oversize
Specifications
● Features: WTB/SUNTOUR Grease Guard System
● Type: ATB
● Ball size: 5/32"x20pcs
● Stack height: 37mm (JIS, ITALIAN)
34mm (OVER SIZE)
● Weight: 125g

J	Type	Thread	Race Diameter	
			Upper Cone & Lower Cup	Lower Cone
J	JIS	30.0mm	30.0mm	27.0mm
I	English & Italian	BC1"x24T	30.2mm	26.4mm
OS	Oversize	BC1-1/8"x28T	34.0mm	30.0mm

19 SEAT POST
Model: SP-XP00
(Code No. 53669910) 26.8mm/L=300mm
(Code No. 53669912) 27.0mm/L=300mm
(Code No. 53669914) 27.2mm/L=300mm
Specifications
● Diameter: 25.0mm, 26.4mm, 26.6mm,
26.8mm, 27.0mm, 27.2mm
● Saddle angle adjustment range:
22-degrees
● Saddle rail diameter: 7~8mm
● Weight: 290g (26.8mm/L=300mm)

20 SEAT POST (OVER SIZE)
Model: SP-XP10
(Code No. 53639921) 29.8mm/L=300mm
(Code No. 53639931) 30.2mm/L=300mm
Specifications
● Diameter: 29.8mm, 30.2mm
● Saddle angle adjustment range:
21-degrees
● Saddle rail diameter: 7~8mm
● Weight: 279g (29.8mm/L=300mm)

The new XC-Pro pedal has been refined and upgraded for easier foot placement and pedalling. (adapted Grease Guard System.)



11 Shown here is a representative selection of this component. The specifications of other products are also listed.